


## EnergyPro EP600i

### Energy Datalogger

- RMS Data** • Min, Max, and Average RMS data storage.
- Power Quality** • THD, Harmonics, Voltage and Current Unbalance.
- Connection Type** • 1P2W, 1P3W, 3P3W, 3P4W, 2.5Element.
- Power Calculations** • KW, KVA, KVAR, KWHR, KW/HR.  
 • Displays total and average energy usage (KWHR and KW/HR) during the survey.  
 • True Power Factor (KW divided by KVA).

- Voltage** V1,V2,V3 0 - 600 VAC
- Current** CT1, CT2, CT3 10 - 3000A Clamp CT  
 WideRangeFlexCT™ 0.2A - 2500A Flex CT
- Frequency** 45 - 65 Hz
- Accuracy** Voltage: 0.5% of full scale  
 Current: 0.5% of full scale
- Storage Rate** 1 second to 30 minutes
- Power Supply** Internal from V1 (100V to 600V)
- Battery Backup** 30 hrs Run time
- Memory** 1G removable memory cards
- Operating Temperature** -20°C to 60°C

\* Specifications subject to change without notice

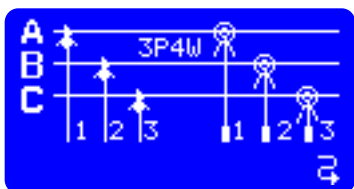

	KW	KVA	KVAR
A	228.4	235.5	57.4
B	229.4	229.8	55.9
C	229.3	234.0	46.7
T	681	699	160

KWHR

**TOTAL KWHR**  
**3014.00**  
**AUG KW/HR**  
**109.49**



**Truly Portable!!**  
 Internal power supply uses measured voltage.  
 No More Power Cords!